




Premium Composite Decking Tiles

Composition:	Composite board • 55% – wood flour • 35% – high-density polyethylene (HDPE) • 10% – anti-UV additives, stabilizers, colourants Base • Polypropylene
Dimensions:	Premium Composite decking tile • thickness – 25 mm ($\pm 0,5$ mm) • length/width – 300 mm ($\pm 1,0$ mm) Decking tile left/right corner • thickness – 25 mm ($\pm 0,5$ mm) • length – 370 mm ($\pm 1,0$ mm) • width – 75 mm ($\pm 1,0$ mm) Premium decking tile edge • thickness – 25 mm ($\pm 0,5$ mm) • length – 300 mm ($\pm 1,0$ mm) • width – 75 mm ($\pm 1,0$ mm)
Properties:	• use in temperatures $-30^{\circ}\text{C}/+60^{\circ}\text{C}$ • low water absorption $<0,5\%$ (frost-resistant) • high resistance to UV • high resistance to cracking (excluding cracks caused by shock load) • high resistance to rotting and decay resulting from the direct action of fungi and bacteria • high resistance to damage caused by the direct impact of insects • polymer coating increasing stain resistance and color durability
Usage:	• terraces • alleys • balconies

TECHNICAL DATA SHEET

STANDARD/PREMIUM DECKING TILE
300 mm x 300 mm x 25 mm

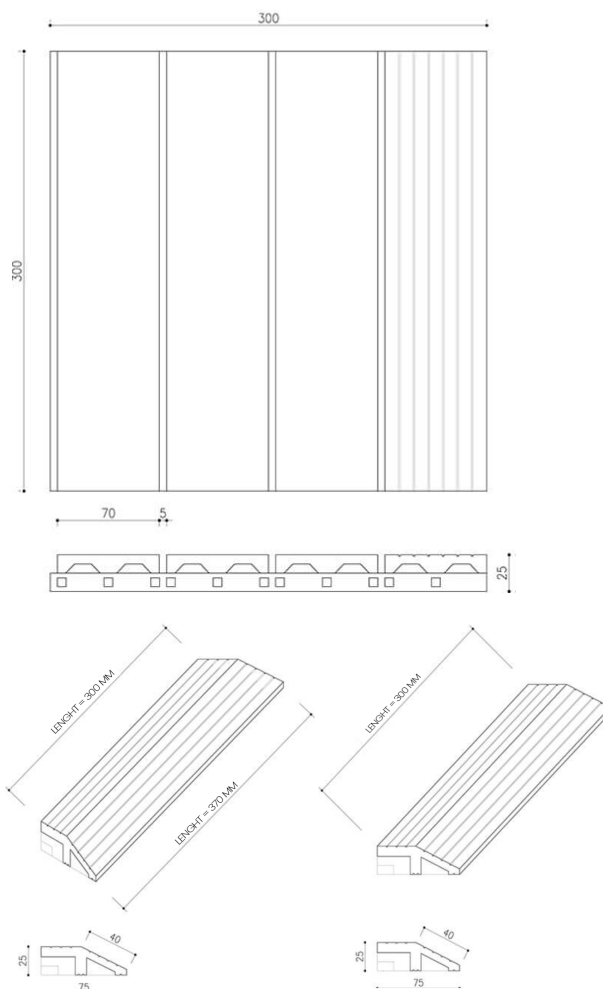

Available colours:

GRAY



REDWOOD



AMBER



ECRU



EcoTravers decking tiles should not be installed in closed, damp and unventilated rooms, as well as in places with rapid and significant temperature changes (e.g. sauna). The substrate should be flat, hardened and with a slope of 2%.

Before installation read the instructions on www.liderwood.com.

During the first exploitation period the composite decking tiles age under the influence of external conditions. The color stabilizes after a few months, reaching its final saturation. EcoTravers composite products may deviate from the available descriptions and samples in terms of natural color or structure differences. The tiles may be subject to slight deformation ($\sim 1.5\%$).

Available documents:

- Guarantee certificate
- Rules for the use and care of products
- Rules and conditions for proper storage of products

All documents are available on www.liderwood.pl on a 'download' page.